# Fort Knox, KY Containment Berm Unit Installation



Prepared by:

U.S. Army Environmental Command Fort Sam Houston, TX 78234-7664

U.S. Army Corps of Engineers, Engineer Research and Development Center Environmental Laboratory Vicksburg, MS 39180







Approved for Public Release; Distribution is Unlimited

#### **Report Documentation Page**

Form Approved OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 01 FEB 2013	2. REPORT TYPE	3. DATES COVERED	
4. TITLE AND SUBTITLE	5a. CONTRACT NUMBER		
Fort Knox, KY Containment Berm Un	5b. GRANT NUMBER		
	5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)	5d. PROJECT NUMBER		
Robert Kirgan; Andy Martin; Steven I Nestler	5e. TASK NUMBER		
1 (Colifornia de la colifornia de la col	5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND AD Environmental Laboratory, U.S. Army Development Center, 3909 Halls Ferry	8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
	11. SPONSOR/MONITOR'S REPORT NUMBER(S)		

12. DISTRIBUTION/AVAILABILITY STATEMENT

Approved for public release; distribution unlimited.

13. SUPPLEMENTARY NOTES

The original document contains color images.

#### 14. ABSTRACT

There is interest from the range community in establishing a sustainable, closed loop small arms firing range (SAFR) bullet impact system or Containment Berm Unit (connex). Connex is a generic term used to refer to a common modified steel storage container used in a vast number of commercial storage and transport applications. The connexes constructed for the Passive Reactive Berm (PRBerm?) technology that was demonstrated at Charleston Air Force Base (CAFB) under the Environmental Security Technology Certification Program (ESTCP) project ER-0406 provide suitable containment of berm material at an active SAFR. Bullets will be fired into berm material (sand) contained in the modified connexes and leachate water will be released from the system. The metals from the bullets will be retained, stabilized, in the berm material with the addition of proper amendments. Following sufficient firing into the Containment Berm Unit, the berm material can be excavated, the bullets and bullet fragments removed and recycled, and berm material replaced or placed back in the connex. This provides a closed loop containment system for sustainable range training purposes. The Containment Berm Unit can be made transportable and easily adapted to varied installation training requirements. Installation of a Containment Berm Unit occurred at the Fort Knox, KY Heins Qualification Test Range (QTR), a multipurpose range, at a cost of \$7000.00 (2012\$) for fabrication and delivery; the installation provided equipment and operators to assist. Data collection to demonstrate technology efficiency is on-going; however, completion of the Fort Knox connex demonstrates successful transfer of an ESTCP- and U.S. Army Environmental Command- developed technology to the installation.

15. SUBJECT TERMS

## Fort Knox, KY Containment Berm Unit Installation

Robert Kirgan, W. Andy Martin, Steve L. Larson, Deborah R. Felt, Catherine February 2013 C. Nestler

# Fort Knox, KY Containment Berm Unit Installation

#### Robert Kirgan

U.S. Army Environmental Command 2450 Connell Road Fort Sam Houston, TX 78234-7664

W. Andy Martin, Steven L. Larson, Deborah R. Felt

Environmental Laboratory U.S. Army Engineer Research and Development Center 3909 Halls Ferry Rd. Vicksburg, MS 39180-6199

#### Catherine C. Nestler

Applied Research Associates, Inc. 119 Monument Place Vicksburg, MS 39180

#### **Summary Report**

Approved for public release; distribution is unlimited.

Prepared for US Army Environmental Command

Monitored by US Army Engineer Research and Development Center 3909 Halls Ferry Road, Vicksburg, MS 39180-6199

#### **Abstract:**

There is interest from the range community in establishing a sustainable, closed loop small arms firing range (SAFR) bullet impact system or Containment Berm Unit (connex). Connex is a generic term used to refer to a common modified steel storage container used in a vast number of commercial storage and transport applications. The connexes constructed for the Passive Reactive Berm (PRBerm™) technology that was demonstrated at Charleston Air Force Base (CAFB) under the Environmental Security Technology Certification Program (ESTCP) project ER-0406 provide suitable containment of berm material at an active SAFR.

Bullets will be fired into berm material (sand) contained in the modified connexes and leachate water will be released from the system. The metals from the bullets will be retained, stabilized, in the berm material with the addition of proper amendments. Following sufficient firing into the Containment Berm Unit, the berm material can be excavated, the bullets and bullet fragments removed and recycled, and berm material replaced or placed back in the connex. This provides a closed loop containment system for sustainable range training purposes. The Containment Berm Unit can be made transportable and easily adapted to varied installation training requirements. Installation of a Containment Berm Unit occurred at the Fort Knox, KY Heins Qualification Test Range (QTR), a multipurpose range, at a cost of \$7000.00 (2012\$) for fabrication and delivery; the installation provided equipment and operators to assist. Data collection to demonstrate technology efficiency is on-going; however, completion of the Fort Knox connex demonstrates successful transfer of an ESTCP- and U.S. Army Environmental Command- developed technology to the installation.

**DISCLAIMER:** The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products. All product names and trademarks cited are the property of their respective owners. The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

DESTROY THIS REPORT WHEN NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.

### **Contents**

**Report Documentation Page** 

Abs	tract:.			1
Fig	ures a	nd Table	es	3
Pre	face			4
Acr	onyms			5
1	Intro	duction		6
	1.1	Backg	ground	6
	1.2		se	
	1.3		tive	
2	Insta	llation o	of the Containment Berm Unit (Modified Connex)	8
	2.1	Site Vi	isit	8
		2.1.1	Initial Site Visit	8
		2.1.2	Coordination Site Visit	9
	2.2	Conta	inment Berm Unit Installation	9
		2.2.1	Installation Preparation	9
		2.2.2	Containment Berm Unit Costs	11
		2.2.3	Containment Berm Unit Installation	14
3	Conc	lusions		20
4	Futur	e Work	<u></u>	21
Ref	erence	es		22

# **Figures and Tables**

#### **Figures**

Figure 1. The 500 meter target, proposed location of the Containment Berm Unit	8
Figure 2. The 500 meter target impact pocket for majority of rounds	9
Figure 3. Containment Berm Schematic Drawing	10
Figure 4. Painted containment berm prior to installation.	11
Figure 5. Initial excavation using a backhoe, showing marking flags.	15
Figure 6. Final excavation at a depth ranging from 2 to 5 feet	15
Figure 7. Fabricated connex unit after being lowered into the excavated berm	16
Figure 8. Placement of drainage port for the Containment Berm Unit.	17
Figure 9. Backfill of the fabricated connex prior to filling the unit with sand and amendments.	18
Figure 10. Filling Containment Berm Unit with sand and metal stabilizing soil amendment	18
Figure 11. Completed Containment Berm Unit after re-grading	19
Tables	
Table 1. Cost Breakdown for Installation of One Containment Berm Unit.	12
Table 2. Comparative Cost and Maintenance of SAFR Impact Technologies	13

#### **Preface**

This summary report provides detailed results for the planning and installation of a 500 meter Containment Berm Unit located at the Fort Knox, KY, Heins QTR range. The U.S. Army Engineer Research and Development Center (ERDC), Vicksburg, MS conducted this work. Project oversight and funding for ERDC was provided by the U.S. Army Environmental Command (USAEC), San Antonio, TX. The USAEC point of contact (POCs) for this effort are Dr. Robert Kirgan and Mr. Curtis Fey.

The report was prepared by Mr. W. Andy Martin, Ms. Deborah R. Felt, and Dr. Steven L. Larson, ERDC–Environmental Laboratory (EL); Ms. Catherine C. Nestler, Applied Research Associates, Inc. (ARA), Vicksburg, MS.

### **Acronyms**

CAFB Charleston Air Force Base

ESTCP Environmental Security Technology Certification Program

ISO International Organization for Standardization

O&M Operation and Maintenance

PRBerm<sup>™</sup> Passive Reactive Berm

QTR Qualification Test Range

SAFR Small arms firing range

SPLP Synthetic Precipitation Leaching Procedure

USAEC US Army Environmental Command

#### 1 Introduction

#### 1.1 Background

There is interest from the range community in establishing a sustainable, closed loop small arms firing range (SAFR) bullet impact system; a modified connex or Containment Berm Unit. The original connexes were constructed for the Passive Reactive Berm (PRBerm™) technology demonstration at Charleston Air Force Base (CAFB) under the Environmental Security Technology Certification Program (ESTCP) Project ER-0406 (Larson et al. 2007, Wynter et al. 2012, in press).

The PRBerm™ connexes are filled with sand (or sand + amendments) that contain bullets fired into berm material. The use of amendments will depend on the site conditions to include: weathering conditions, range use, bullet components, operation and maintenance (O&M) plan, and soil type. With the addition of proper amendments, the sand, sand/amendments can also retain and stabilize metals while releasing leachate water that meets Federal, State and local regulatory requirements.

Following sufficient firing into the containment berm, the berm material can be excavated, the bullets and bullet fragments can be removed and recycled, and then the berm material can be replaced or placed back in the containment berm. This process can provide a closed loop containment system for sustainable range operations and training purposes. An additional benefit is that the single Containment Berm Unit, if desired, can be manufactured so that it is transportable and thus easily adapted to varied installation training requirements.

#### 1.2 Purpose

The purpose of this summary report is to document the results of the placement of a Containment Berm Unit (modified connex) at the Fort Knox, KY, Heins QTR range used for small arms training, 50 caliber or less. The document provides a step-by -step process for installation procedures. This document also provides cost estimates for the Containment Berm Unit placed at the Fort Knox, KY range and a

discussion of factors that will impact cost at other areas.

#### 1.3 Objective

The overall objective was to support the U.S. Army Environmental Command's (USAEC) effort to provide a Containment Berm Unit that offers ease of installation, sufficient containment of bullets and bullet fragments for later removal from the berm material (i.e. sand) and recycling. The ultimate demonstration is a closed loop SAFR system where the berm material (i.e. sand, sand/amendments) can be placed back in the containment unit following removal of bullets and bullet fragments. It is also the goal to determine how the Containment Berm Units perform when challenged with newly developed ammunition in support of the US Army's training and tactical mission.

The tasks documented in the scope of work are:

Task 1. Design and construction of the Containment Berm Unit.

Task 2. Installation of the Containment Berm Unit.

Task 3. Analysis of the Containment Berm Unit while in use.

Task 4. Technology transfer via report / presentation following the project.

Long term performance objectives provide valuable insight into the ability of the Containment Berm Unit to function as designed and engineered. There are several long term objectives that could be addressed: post-installation site visit, investigate leachate metals concentrations, investigate alternative munition performance, remove the Containment Berm Unit and investigate its long term performance in regards to structural integrity. These tasks will provide additional performance evaluation critical to the connex design and use.

# 2 Installation of the Containment Berm Unit (Modified Connex)

#### 2.1 Site Visit

#### 2.1.1 Initial Site Visit

The first site visit was conducted in the fall of 2011 to determine the applicability of the Containment Berm Unit installation at the Fort Knox, KY, Heins QTR range. It was determined that the 500 meter target, Figure 1, would provide the best evaluation of the Containment Berm Unit at the Fort Knox Heins QTR range, since it is regularly used as a familiarization target. The unit placement was determined to be best located where the round impacts were visible in the berm, Figure 2.



Figure 1. The 500 meter target, proposed location of the Containment Berm Unit.



Figure 2. The 500 meter target impact pocket for majority of rounds.

#### 2.1.2 Coordination Site Visit

A second site visit was conducted in April 2012 in order to coordinate equipment and placement of the Containment Berm Unit. A final site inspection determined connex placement, connex design specifications, and overall general lay of the land prior to installation. Equipment coordinated for berm installation included: a fork lift, bobcat, backhoe, and dump trucks.

#### 2.2 Containment Berm Unit Installation

#### 2.2.1 Installation Preparation

The Containment Berm Unit preparation included site visits to the Fort Knox Heins Range and coordination meetings regarding the connex installation. Procurement of materials and supplies, and connex (Figure 3) design and construction were also coordinated.

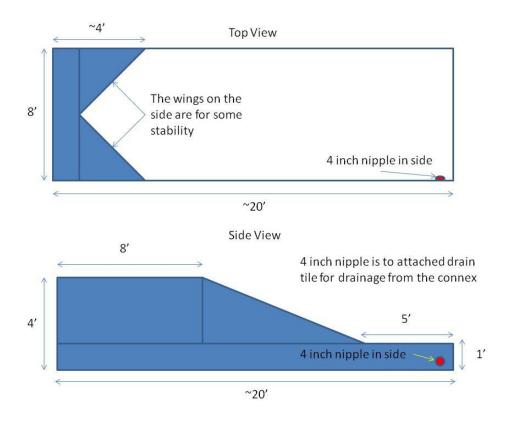


Figure 3. Containment Berm Schematic Drawing.

The PRBerm™ from the ER-0406 project was constructed out of a 20 foot refrigerated container and some modifications to that design were incorporated in the connex used at Fort Knox. These modifications include reduced height profile (4 feet vs 8 feet), use of the starting connex type, and some slight finishing modifications. The Containment Berm Unit was fabricated by inverting a 20 foot International Organization for Standardization (ISO) shipping container, or connex, and modifying the connex as specified in Figure 23. The edges of the connex were finished with angle iron, so no sharp edges were exposed. The connex was painted with an epoxy paint to retard corrosion and the floor was finished with a skid free paint to avoid potential slips (Figure 4).



Figure 4. Painted containment berm prior to installation.

#### 2.2.2 Containment Berm Unit Costs

The cost is reported as the fabrication and installation of one Containment Berm Unit. While this provides a good estimate of what it may cost to install multiple Containment Berm Units, the user should be aware that cost offsets could also be incorporated due to various factors such as:

- Reduced rate for fabrication and purchase of multiple connexes,
- Reduced costs associated with an experienced crew placing several units and reduced mobilization time,
- Using garrison available equipment over renting equipment,
- Using borrowed labor, such as on-station military engineers, to place Containment Berm Units,
- Disposal and / or stabilization of berm spoil material.

The initial assumptions are listed below and are based on previous work as well as results from the PRBerm™ study (Larson et al. 2004; Larson et al. 2005; Larson et al. 2007, Wynter et al. 2012, in press). The use of a containment berm may be indicated when the native soils of the bullet impact area:

- are characterized by high acidity (low pH),
- are characterized by high alkalinity (high pH),
- have high permeability,
- and have low soil/water K<sub>d</sub> values for a particular metal (such as lead)

The majority costs associated with the Containment Berm Units are material and labor. Construction and installation of a single unit can run from \$7,000.00 to \$18,500.00 depending on the available assets and resources (Table 1). Generally, material costs will scale linearly with increasing numbers of Containment Berm Units, unless cost breaks are given by the manufacturer for a large number of connexes, since the cost of sand and amendments is relatively small. However, the cost can be offset, as mentioned above, by the installation of multiple Containment Berm Units at the same time which reduces equipment mobilization fees.

Table 1. Cost Breakdown for Installation of One Containment Berm Unit.

Floment	Quantity	Fort	Knox	Potential		
Element	Quantity	Cost	Total	Cost	Total	
20 Foot Connex	1			\$ 1,500.00	\$ 1,500.00	
Fabrication / Handling	1	\$ 5,000.00	\$ 5,000.00	\$ 5,000.00	\$ 5,000.00	
Painting	1	\$ 2,000.00	\$ 2,000.00	\$ 2,000.00	\$ 2,000.00	
Drainage Port (10 foot sections)	2	\$ 6.00	\$ 12.00	\$ 6.00	\$ 12.00	
Equipment Operator Labor (man hours)	12			\$ 50.00	\$ 600.00	
Supervisor	6			\$ 75.00	\$ 450.00	
Bobcat	1			\$ 2,000.00	\$ 2,000.00	
Backhoe	1			\$ 2,000.00	\$ 2,000.00	
Fork Lift	1			\$ 1,500.00	\$ 1,500.00	
Dump Truck	1			\$ 2,000.00	\$ 2,000.00	
Grass Seed	1			\$ 25.00	\$ 25.00	
Straw	12			\$ 20.00	\$ 240.00	
Sand (per 10 ton)	3			\$ 400.00	\$ 1,200.00	
	TOTAL	\$	7,012.00	\$	18,527.00	

The cost of a traditional small arms earthen berm compared to the cost of a fixed Containment Berm Unit / PRBerm™, and a steel bullet trap is shown in Table 2 (updated, ESTCP ER-0406 Cost and Performance Report). The estimated construction cost for a 100 foot containment berm is approximately \$55K more than a traditional eathern berm and for the construction of a steel bullet trap is estimated at \$210K more than a traditional earthen berm.

Table 2. Comparative Cost and Maintenance of SAFR Impact Technologies (\$) (updated, ESTCP ER-0406 Cost and Performance Report).

Technology	Construc- tion Cost <sup>a</sup> \$	Yearly O&M <sup>b</sup> \$	Years in Opera- tion	30 Year O&M Cost \$	Overhaul at 10 years \$	Number of Over- hauls	Cost for Over- hauls \$	30 year Total Cost <sup>c</sup> \$
Earthen berm(2003\$)	108,672	5000	30	150,000.00	54,336	2	108,672	367,343.90
Containment Berm Unit / PRBerm(2011 \$)	162,284	3750	30	112,500.00	81,142	2	162,284	437,068.90
Steel bullet trap(2011\$)	322,850	12,000	30	360,000.00	176,425	2	352,850	1,035,699.65

<sup>&</sup>lt;sup>a</sup>Assumes for 100 ft berm; does not include range floor or surrounding area

A stabilization material commercially identified as TRAPPS<sup>TM</sup> was used to stabilize a small volume of berm spoil removed to place the containment berm. The TRAPPS<sup>TM</sup> was selected for use to stabilize the metals in the soil based on its synthetic precipitation leaching procedure (SPLP) results so that the berm spoils could be treated and used elsewhere on the range. Amendments were not used in the actual containment berm sand as per the project scope, but could be added. The cost for the TRAPPS<sup>TM</sup> stabilization material was \$3,000.00 to include shipping and is provided to give the reader a general cost estimate for this material or suitable material. An amendment cost is based on several factors such as quantity needed, availability, ease of use and shipping, etc.

b5,000 Estimated cost for sand addition, less sand addition required for containment berm

Adjusted for inflation to 2012\$

The cost estimates in Table 2 does not include ejecta material (i.e. ejected during impact or berm O&M, etc.) that would have to be remediated / cleaned up due to final closure. The volume of soil would substantially increase and may or may not be pertinent to the containment berm or steel trap technologies.

In general, the cost of a Containment Berm Unit or PRBerm™ is slightly more than a traditional earthen berm due to the additional contrainment connex and amendment (if needed), while much less than the cost of a steel bullet trap system. Maintenance of the Containment Berm Unit is minimal, little more than what is required for an earthen berm. Life cycle cost analysis should note that the Containment Berm Unit reduces metal migration, therefore the potential of permit problems and regulatory fines, range shutdown issues and a reduced training capability. In addition, metal recycling from the Containment Berm Unit could offset yearly maintenance costs.

#### 2.2.3 Containment Berm Unit Installation

The Containment Berm Unit installation was planned to occur over a three day time period to accommodate potential rain delays. Fabrication of the connex, as well as equipment and operators, were coordinated prior to installation. Sand was ordered to be delivered on the second day of installation with the option of early delivery if requested.

The berm area to be excavated was marked off with flags and marking paint (Figure 5). The excavation continued until the hole was large enough to place the Containment Berm Unit (modified connex) with approximately 12 to 18 inches of cover material (Figure 6). The floor was sloped to allow drainage from the unit.



Figure 5. Initial excavation using a backhoe, showing marking flags.



Figure 6. Final excavation at a depth ranging from 2 to 5 feet.

Following excavation, the fabricated connex was lowered into place using a forklift, ensuring proper alignment with the point of aim (Figure 7). The unit was fitted with a four inch diameter drain port to ensure proper drainage (Figure 8).



Figure 7. Fabricated connex unit after being lowered into the excavated berm.



Figure 8. Placement of drainage port for the Containment Berm Unit.

The area around the fabricated connex was backfilled (Figure 9) prior to placement of sand into the unit to avoid the bowing of the containment berm walls.



Figure 9. Backfill of the fabricated connex prior to filling the unit with sand and amendments.

The Containment Berm Unit was filled with 22.5 cubic yards of sand (Figure 10) compacted into the containment berm using the backhoe and bobcat to ensure that air pockets were removed. Following compaction, the berm was regraded to conform to the contours of the range and make it ready for use (Figure 11).



Figure 10. Filling Containment Berm Unit with sand and metal stabilizing soil amendment.



Figure 11. Completed Containment Berm Unit after re-grading.

#### 3 Conclusions

Based on our experiences at Fort Knox, after the preparation work, the installation of one Containment Berm Unit can be accomplished in under six (6) hours with experienced equipment operators and prior coordination to ensure equipment, fabricated connex, and fill material (e.g. sand) are on site and ready for installation. Sufficient site visits are necessary to ensure proper coordination with garrison staff, and others, for installation. The fabricated containment berm design was based on the PRBerm™ connex design, but was slightly modified to account for onsite conditions and connex availability.

The cost to install one Containment Berm Unit will vary depending on installation equipment, operator experience and material costs; the cost to install one Containment Berm Unit at Fort Knox was \$7,000.00 (not including cost of \$3,000 for soil amendment as necessary).

#### **4 Future Work**

Future work that could move this technology towards large-scale use at SAFRs:

- Three and nine (if needed) month post-installation inspections.
- Evaluate the leachate water generated from the berm.
- Investigate the containment of alternative munitions (primarily small arms munitions) in the berm unit.
- Remove the Containment Berm Unit to evaluate long term, three to five year, performance.
- Evaluate the use of a filter or filter media to capture any metals that may be leaching from the Containment Berm Unit.
- Amendment selection at specific site.

#### References

- Larson, S.L., Tardy, B., Beverly, M., Hearn, A., Thompson, M. and Williams, G. 2004. *Topical application of phosphate amendments to lead-contaminated small arms firing range soils*. ERDC/EL TR-04-15. Vicksburg, MS: U.S. Army Engineer Research and Development Center.
- Larson, S.L., Tardy, B., Rainwater, K. and Tingle, J. 2005. *Rainfall lysimeter evaluation of leachability and surface transport of heavy metals from six soils with and without phosphate amendment*. ERDC TR-05-9. Vicksburg, MS: U.S. Army Engineer Research and Development Center.
- Larson, S.L., Malone, P.G., Weiss, C.A., Martin, W.A., Trest, C., Fabian, G., Warminsky, M.F., Mackie, D., Tasca, J.J. and Wright, J. 2007. *Amended ballistic sand studies to provide low maintenance lead containment at active small arms firing range systems*. ERDC TR-07-14, USACE, Engineer Research and Development Center, Vicksburg, MS.
- Wynter, M., Larson, S.L., Martin, W.A., Griggs, C.S., O'Connor, G., Mackie, D. and Nestler, C.C. 2012, in press. *Passive Reactive Berm to Provide Low Maintenance Lead Containment at Active Small Arms Firing Ranges*. ERDC/EL TR-12-xx, USACE, Engineer Research and Development Center, Vicksburg, MS.